


Soft Wall

SET-UP INSTRUCTIONS



www.redexhibits.com

Toll Free (888) RED. 1118

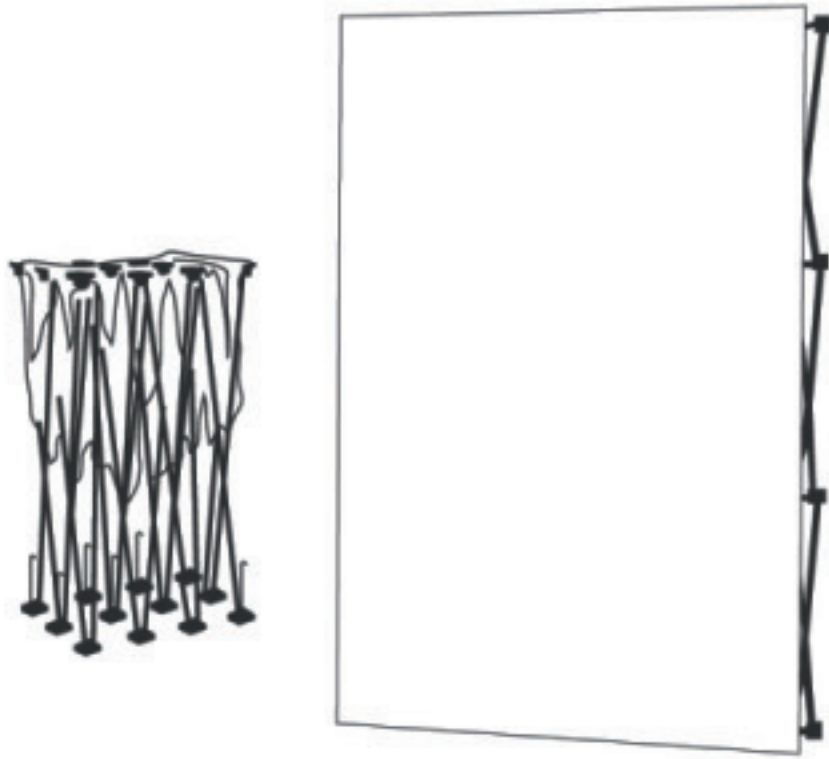

How to set up your Soft Wall :

Warning: To avoid damage. ALL hooks must be disconnected before collapsing the frame.

1 Remove frame and graphic from nylon bag.

2 Ensure "adjustable feet" of frame are on the floor. Pull up display into upright position.

3 Lock all hooks between front and back hubs.

4 Adjust leveling feet for desired angle. Quick Fabric display can now easily be moved into position.

5 **OPTIONAL** Attach lights to top of frame by sliding the plastic "x blocks" under the frames cross sections.

Soft Wall

INSTRUCTION SHEET




www.redexhibits.com
Toll Free (888) RED. 1118

How to attach or replace graphics
in your Soft Wall:


Warning:

To avoid damage. ALL hooks
must be disconnected before
collapsing the frame.

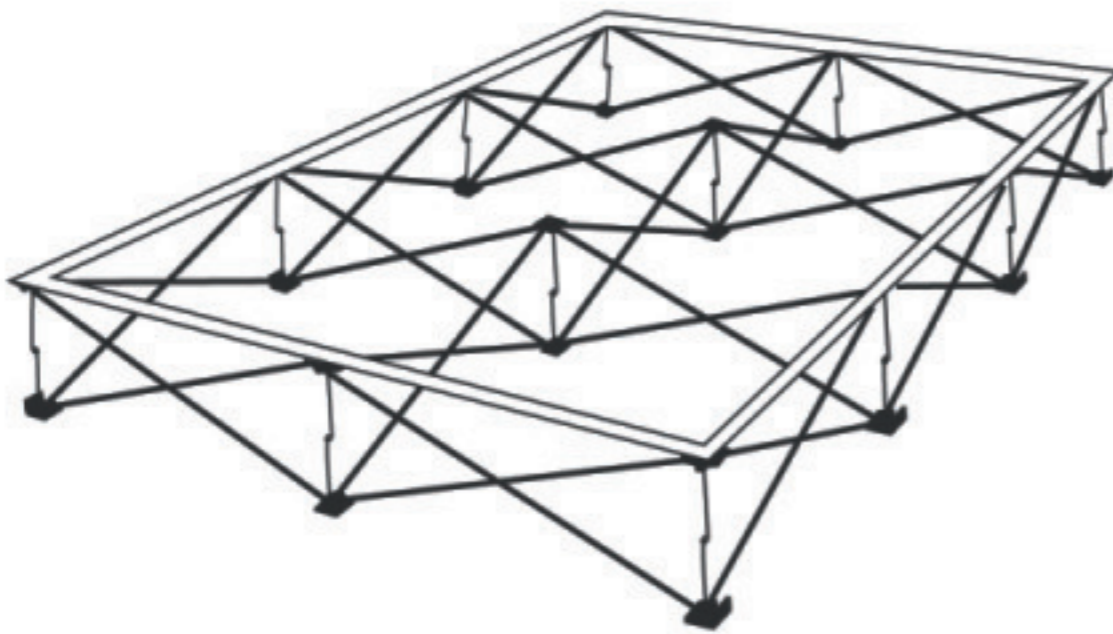


1

Assemble frame and lay flat on its back.
Remove existing graphic.

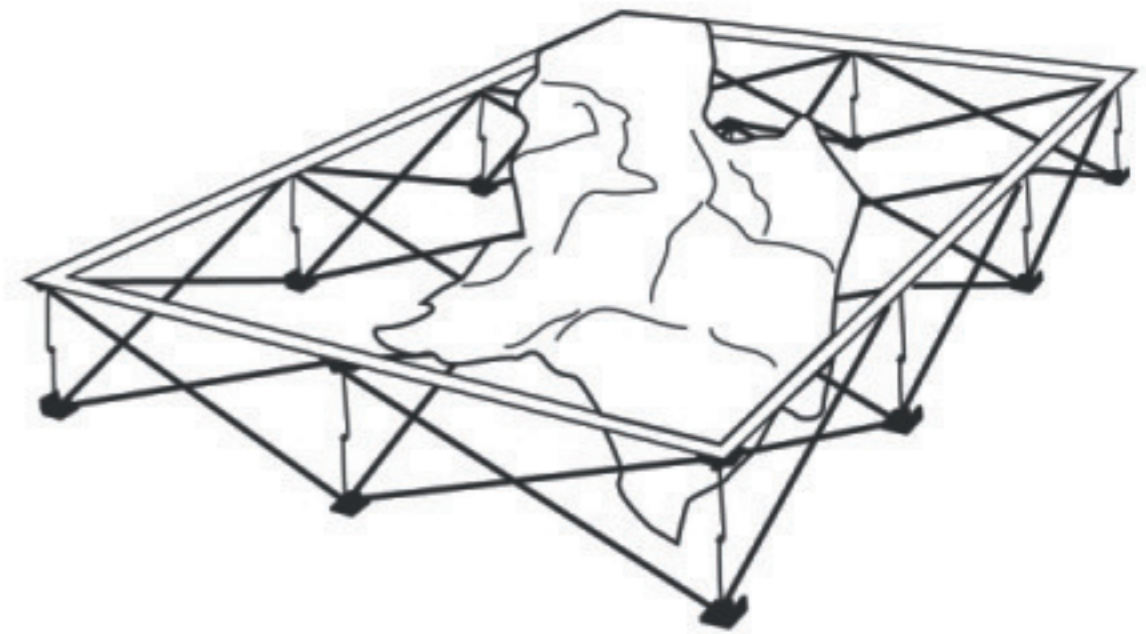

2

Starting at one corner, attach velcro on the
graphic to velcro on the frame.
NOTE: Velcro on the graphic should extend approx. 1/4"
beyond velcro on the frame (it should not be flush).

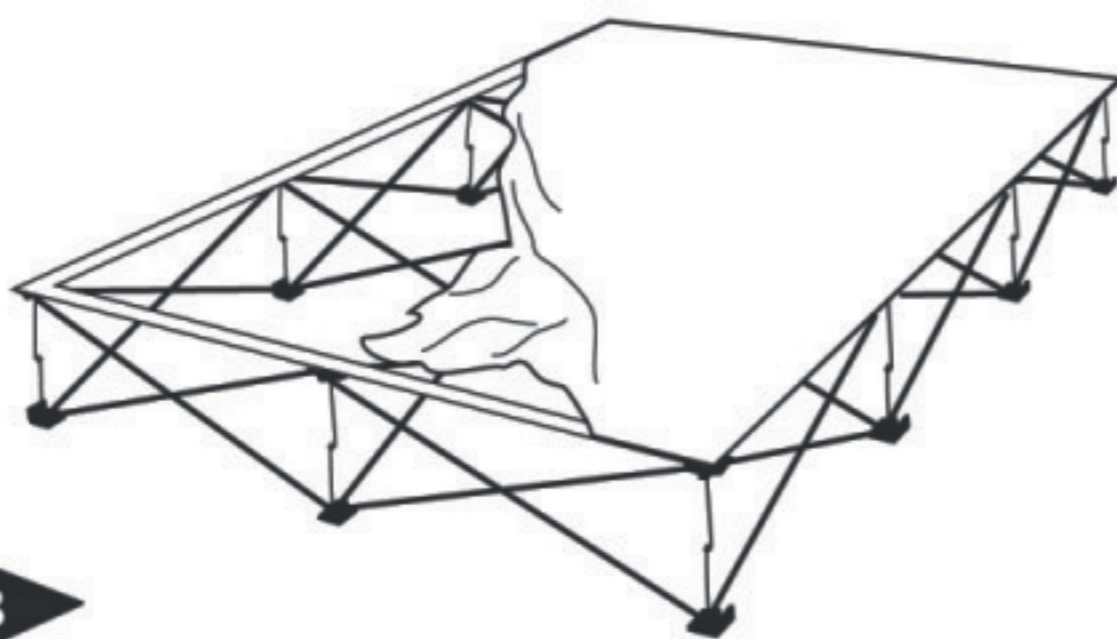

3

Working in a continuous direction around the frame,
attach the rest of the graphic.



4

If needed, adjust velcro for tight fit.