



- A - 2 - Curved frame sections**
- B - 2 - Straight frame sections + 1 ea. center support**
- C - 4 - Corner sections**
- D - Fabric Graphic**

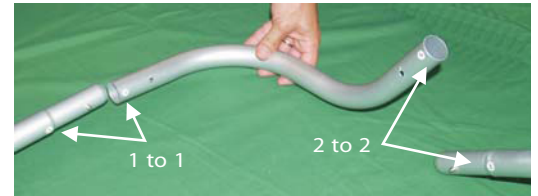

1 Assemble the two curved and Straight sections as shown (Connected with bungee cord).

2 Connect straight section 1 to corner section 1, corner section 2 to 2 curved section 2

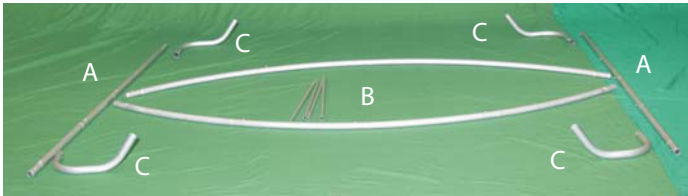

3 Connect remaining straight, corner and curved sections.

4 Assembled frame shown

5 Insert center support pole.



6 Unzip print and lay image face down. Slide print onto frame like a pillow case. The frame is symmetrical there is no top or bottom.

7 Zip the left and bottom edge of graphic to complete assembly.



8 Slide light bracket onto bottom of light fixture. Position light and tighten knob to hold in place. **WARNING! OVERTIGHTENING MAY CAUSE DAMAGE TO FABRIC IMAGE.**



DISASSEMBLY: Disassemble in reverse order. To minimize wrinkles; it is highly recommended that you close the zipper prior to folding the fabric and store it in the plastic zip-lock bag for protection.